


INSULATED WALL THIMBLES

Insulated thimbles are designed per NFPA Standard 37 and 110. Standard thimbles are 24 inches long and are designed for thick walls. Thimbles are shipped with one plate shipped loose. Exterior wall plate welded. Thimble rain guard available separately. See Thimble user guide for additional instructions.

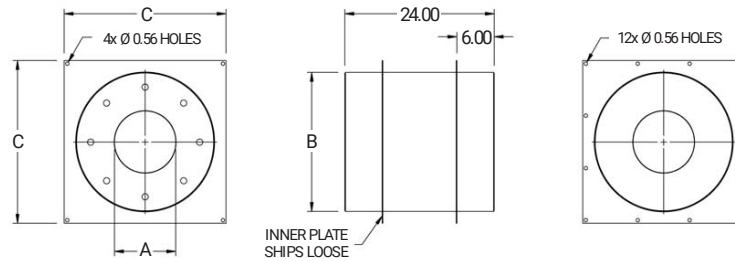

Accessories

Pipe/Tube OD	Material		A (ID)	B (OD)	C	WT
	Carbon Steel	304 Stainless Steel				
3.00	WT-03-12	WT-03-12-3	4.50	16.00	20.00	35
4.00	WT-04-12	WT-04-12-3	6.00	18.00	22.00	40
5.00	WT-05-12	WT-05-12-3	7.00	18.00	22.00	63
6.00	WT-06-12	WT-06-12-3	8.00	20.00	24.00	82
8.00	WT-08-12	WT-08-12-3	10.00	22.00	26.00	121
10.00	WT-10-12	WT-10-12-3	12.00	24.00	28.00	124
12.00	WT-12-12	WT-12-12-3	14.00	26.00	30.00	143
14.00	WT-14-12	WT-14-12-3	16.00	26.00	30.00	157
16.00	WT-16-12	WT-16-12-3	18.00	28.00	32.00	175
18.00	WT-18-12	WT-18-12-3	20.00	30.00	34.00	200
20.00	WT-20-12	WT-20-12-3	22.00	30.00	34.00	250

Meets or exceeds NFPA37 & NFPA110.

Dimensions are in inches. Weight is in pounds and is approximate. Standard material carbon steel painted high temp black, or 304 stainless steel. Custom applications available, contact factory.